




12V200AH

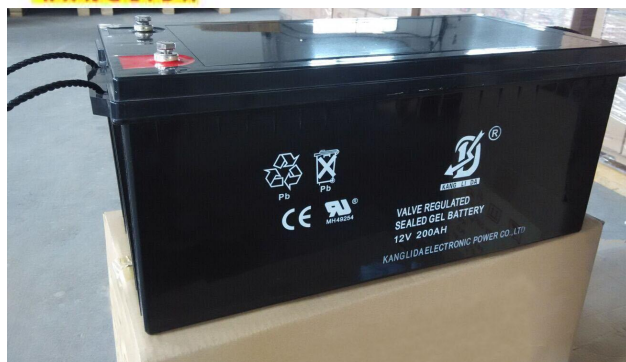

Features:

- ▲ Maintenance-free operation
- ▲ Stable quality and high reliability
- ▲ Compact design
- ▲ 10 years design time (at 25°C)

Applications:

- ♣ UPS
- ♣ Emergency lighting
- ♣ Solar panel system
- ♣ Alarm and security system
- ♣ Telecommunication system
- ♣ Fire alarm and security systems
- ♣ DC power supply Auto control system
- ♣ Backup power for testing and measuring instruments
- ♣ Electronic apparatus and equipment Communication power supply
- ♣ etc

Specifications:

Type	Specification
Nominal Voltage	12v(6cells)
Nominal Capacity	200ah (10hrs, 25°C/77°F)
	170ah (5hrs, 25°C/77°F)
	120ah (1hrs, 25°C/77°F)
Dimension	Length: 522±2mm
	Width: 239±2mm
	Container Height: 218±2mm
	Total Height(with Terminal):224±3mm
Approx Weight	61.0kg
Terminal	T5 or F7
Container material	ABS
Max.Discharge Current	2000A(5s)
Internal Resistance	Approx 3.2mΩ
Operation Temp.Range	Discharge:-15-50°C(5-122°F)
	Charge: 0-40°C(32-104°F)
	Storage: -15-40°C(5-104°F)
Nominal Operating Temp.Range	25±3°C(77±5°F)
Cycle Use	14.4V-14.8V(25°C/77°F) Coefficient:30mv/°C (Initial charging current less than 16.5A)
Standby Use	13.5V-13.8V(25°C/77°F) Coefficient:20mv/°C (No limit on Initial Charging Current)
Capacity affected by Temp.	103% 40°C(104°F)
	100% 25°C(77°F)
	86% 0°C(32°F)

Self Discharge:

KANGLIDA batteries maybe stored for up to 6months at 25°C(77°F) and then a freshing charge is required, for higher temperatures the time interval will be shorter.

Self Discharge:

KANGLIDA batteries maybe stored for up to 6months at 25°C(77°F) and then a freshing charge is required, for higher temperatures the time interval will be shorter.


Capacity after storage	1month	3month	6month	12month
Self-discharge 25°C(77°F)	98%	91%	82%	65%

Note: the above characteristics data are average values obtained within three charge/discharge cycles, not the minimum values.

Constant Current Discharge(Amperes at 25°C/77 °F)										
F.V/Time	10min	15min	30min	45min	1h	2h	3h	5h	10h	20h
1.80V/cell	358	292	182	140	114	66.6	50.0	34.4	20.2	10.40
1.70V/cell	420	342	196	150	121	70.4	52.4	35.6	20.6	10.70
1.60V/cell	470	378	216	162	130	74.4	54.8	37.0	21.0	11.00


Constant Power Discharge(Watts per cell at 25°C/77 °F)										
F.V/Time	10min	15min	30min	45min	1h	2h	3h	5h	10h	20h
1.80V/cell	656	554	342	266	222	128.2	97.0	68.0	40.0	20.58
1.70V/cell	740	612	368	286	230	134.8	101.0	69.8	40.6	21.12
1.60V/cell	806	662	400	302	245	140.4	104.8	71.6	41.0	21.64

Dimensions:

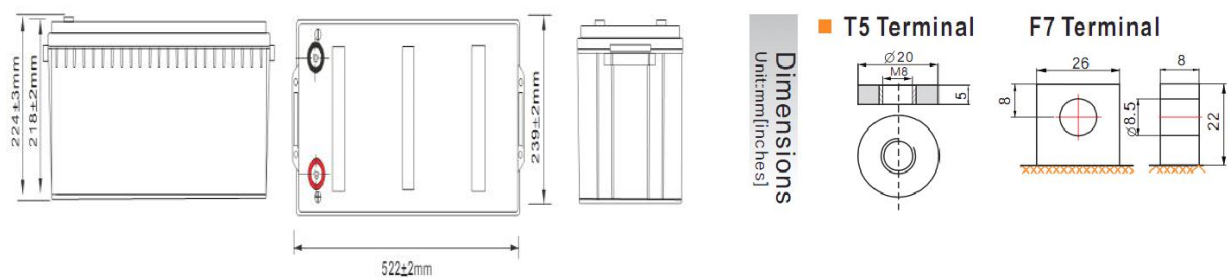






Characteristics:

Charge characteristic Curve for standby use

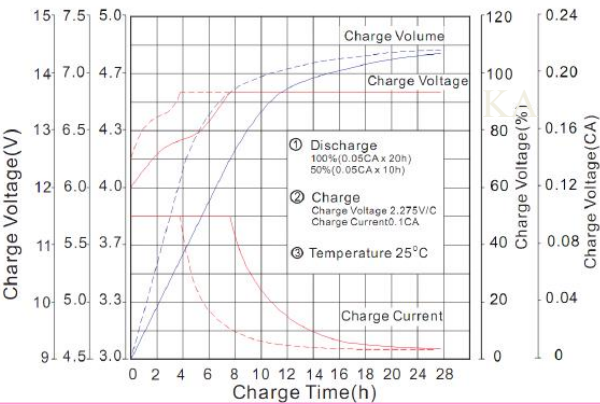

Discharge characteristic Curve

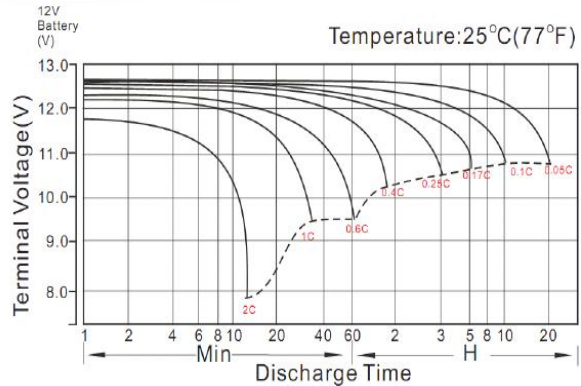

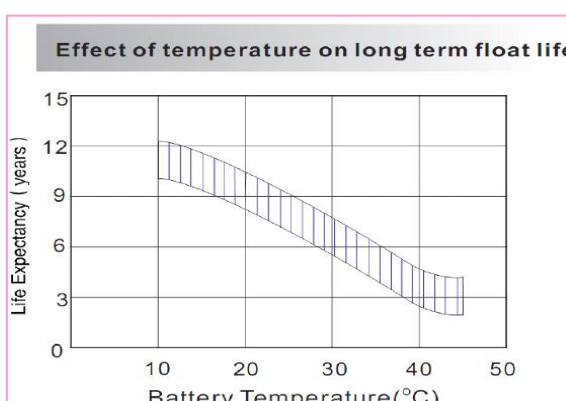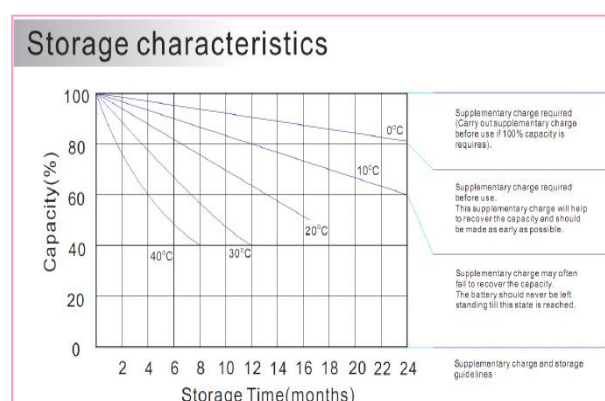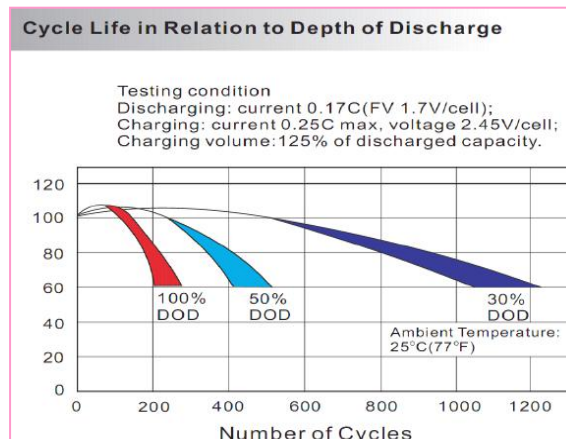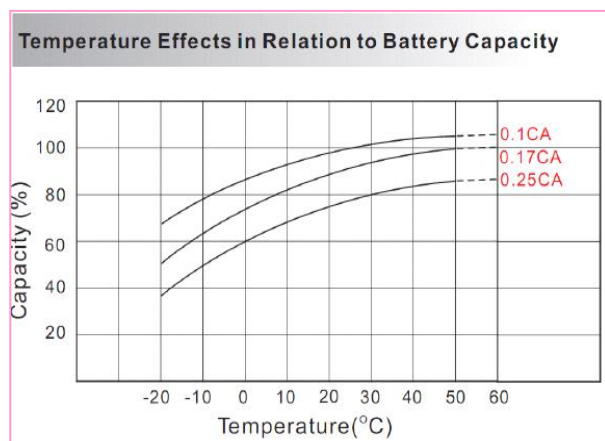

Maintenances and Attentions:

1. After received product, please checked box damaged or not, if find crack on battery body, contact with us and logistics, it should be caused by boorish handle during delivery;
2. Don't pull or shake terminal, otherwise, it may cause terminal loosen;
3. Battery is not allowed close to Tepid source or basked under the sun for a long time;
4. Charge in the obturate container is not allowed;
5. No short circuit. Battery should be stored full of electronic when not in need, and the battery should be charged every three months in order to avoid the irreversible sulphation. When battery case bursts or electrolyte leaks, battery should be changed lest the acid corrosion.
6. No battery in environment with the acid gas.
7. When battery is used as the backup battery, be careful and check it at regular time to avoid the damage battery. Especially the battery beyond one year should be checked in time, and change the less capacity and scrapped battery. (some batteries maybe have voltage but no current; some batteries maybe have current but no voltage; some maybe have both but less capacity: all these conditions cannot meet the work, reach the power-on time. Do not forth small battery, cause the huge losses)
8. Forbidden put battery in the fire, otherwise it will cause an explosion.
9. When battery cracks or leaks, please use cotton cloth clean it. When skin contacts to the liquid, wash with fresh water immediately. See doctor if serious.
10. No wash on the surface of the battery with the organic solution.

康利达国际控股集团有限公司 KANGLIDA INTERNATIONAL HOLDING GROUP CO., LTD

郑州康利达电子电源有限公司 Zhengzhou Kanglida electronic power Co., LTD

<http://www.cnbattery.cn> Fax: 86-371-68786444

<http://www.klddzdy.com> Tel: 86-371-6876444/55628530-816